


FT - TECHNICAL SHEET

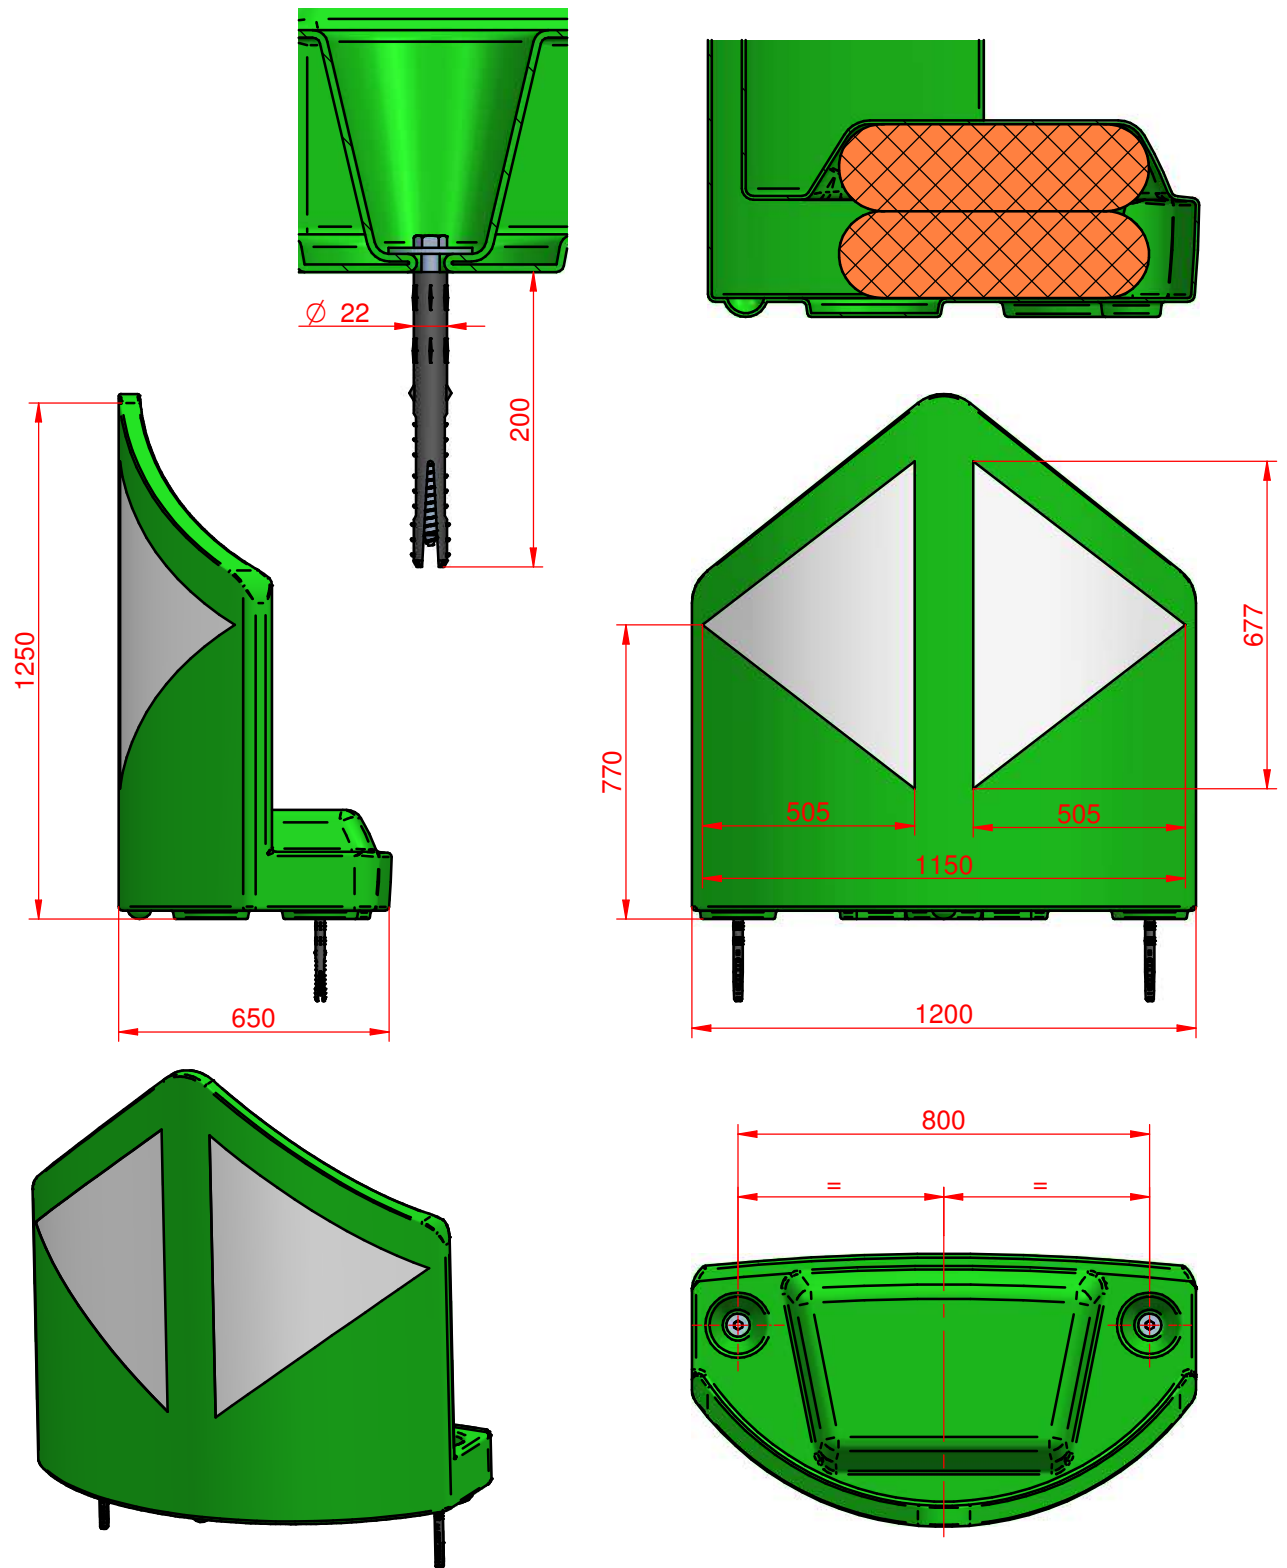

BALLASTING MONOBLOC DIVERGENT INDICATOR OF 120CM WIDE

HIMO122

A4

Divergent Indicator of 120cm wide non-levelable. Made by rotomolding in a single hollow piece **according to the UNE-135360: 2012 Standard**.

Fixed to the ground by two alternative or simultaneous methods:

Method 1: Two powerful expansion anchors of Ø22x200mm (included)

Method 2: Four sandbags of 25Kg.

28-03-19

1:18

Versions with bare or fully reflectorized screen with Class 1 film (E.G) or Class 2 (H.I) and divergent arrows in film Class 2 (H.I) or Class 3 (D.G) **according to UNE-EN 12899-3 Standard**.

SC

FT8-2

DIVERGENCE INDICATORS

SC

señalconfor