


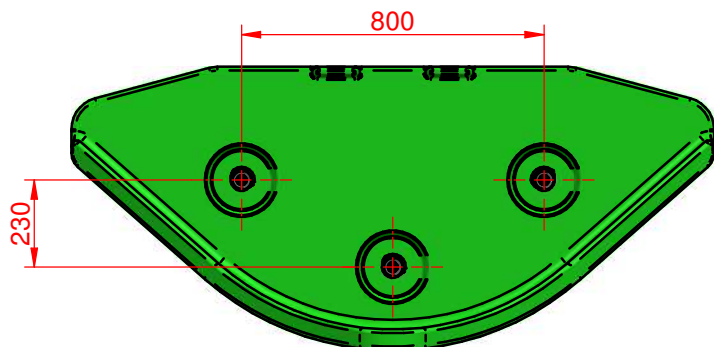
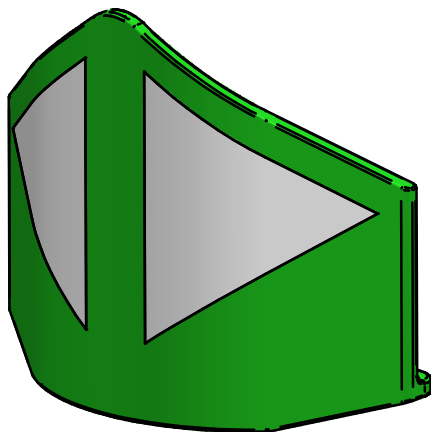
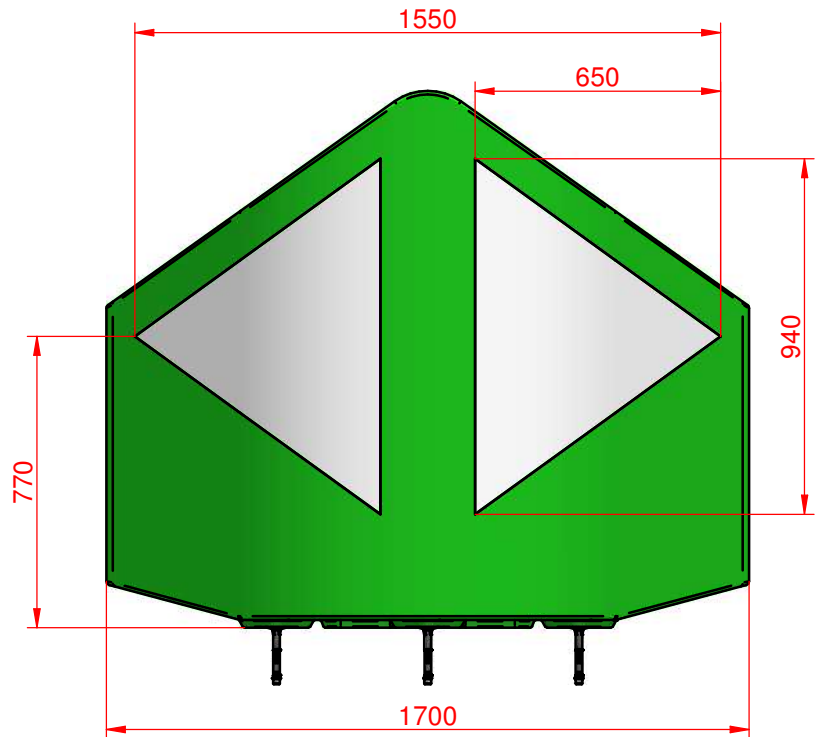


# FT - TECHNICAL SHEET

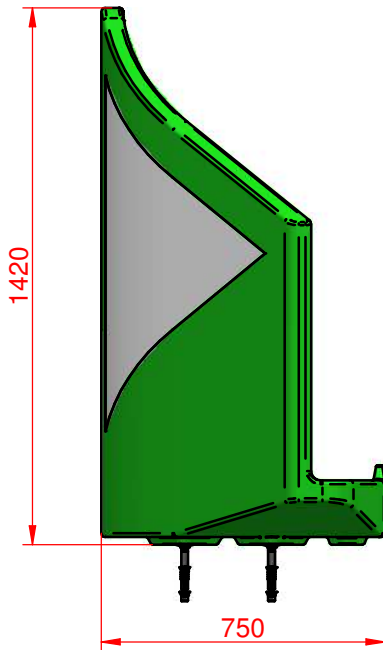

LEVEL

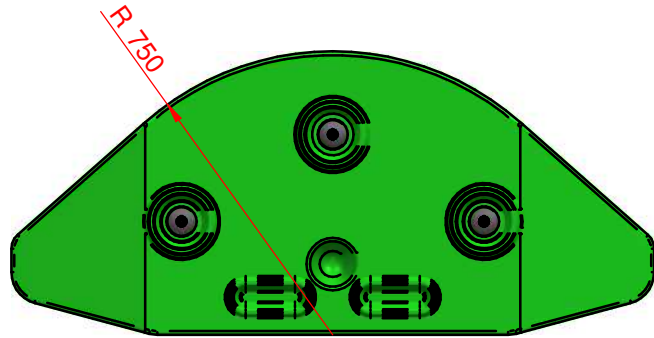

LEVELLABLE MONOBLOC DIVERGENT INDICATOR OF 170CM WIDE		HIMO170
A4	Divergent Indicator of 170cm wide.Made by rotomolding in PE in a single hollow piece <b>according to the UNE-135360: 2012 Standard.</b> Fixed to the ground by three powerful expansion anchors of Ø22x200mm. Levellable by three threaded legs included in uneven surfaces up to 12 degrees.	28-03-19
1:20	Versions with bare or totally reflectorized screen with Class 1 film (E.G) or Class 2 film (H.I) and divergent arrows in film Class 2 (H.I) or Class 3 (D.G) <b>according to UNE-EN 12899-3 Standard.</b>	SC
FT9	DIVERGENCE INDICATORS	<div>SC</div> <div>señalconfor</div>