


# FT - TECHNICAL SHEET

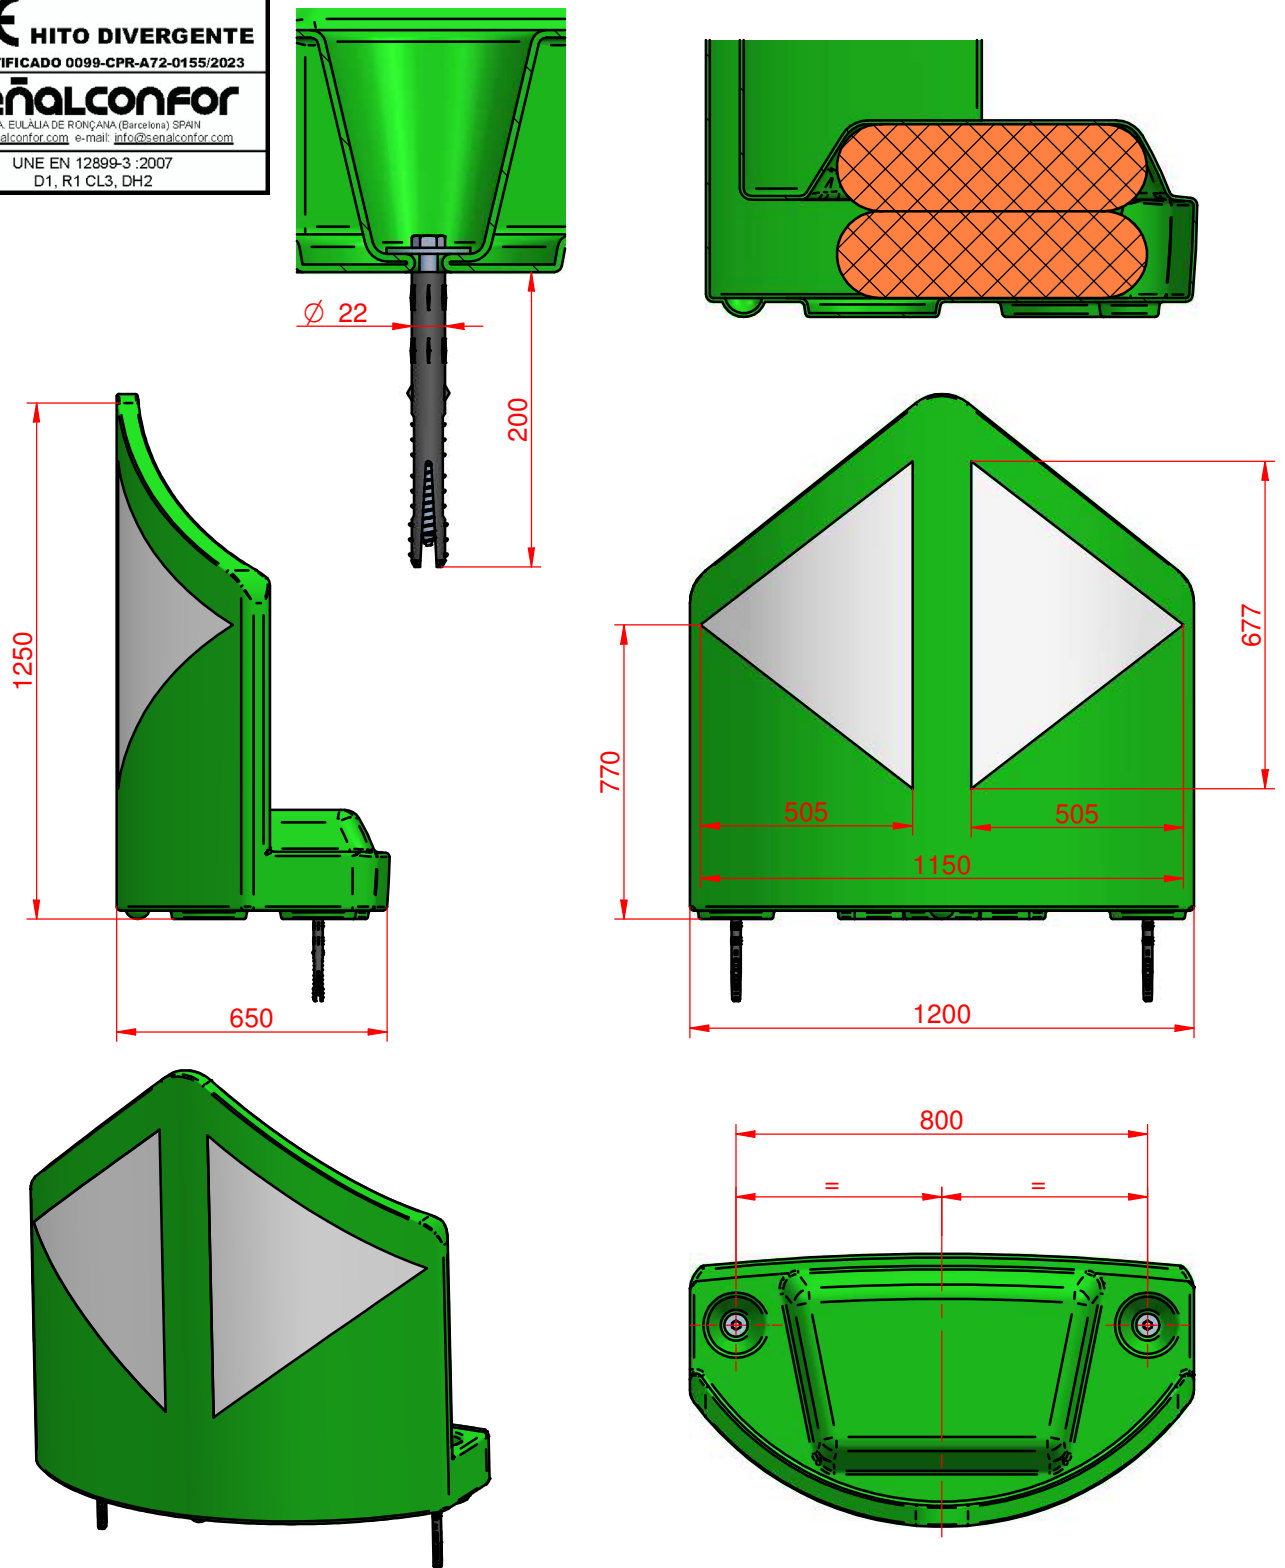

BALLASTING MONOBLOC DIVERGENT INDICATOR OF 120CM WIDE		HIMO122
A4	Divergent Indicator of 120cm wide non-levelable. Made by rotomolding in a single hollow piece <b>according to the UNE-135360: 2012 Standard.</b> Fixed to the ground by two alternative or simultaneous methods: Method 1: Two powerful expansion anchors of Ø22x200mm (included) Method 2: Four sandbags of 25Kg.	06-11-23
1:18	Versions with bare or fully reflectorized screen with Class 1 film (E.G) or Class 2 (H.I) and divergent arrows in film Class 2 (H.I) or Class 3 (D.G) <b>according to EN 12899-3 Standard.</b> <b>PRODUCT WITH CE CERTIFICATE.</b>	SC
FT8-2	DIVERGENCE INDICATORS	SC señalconfor