

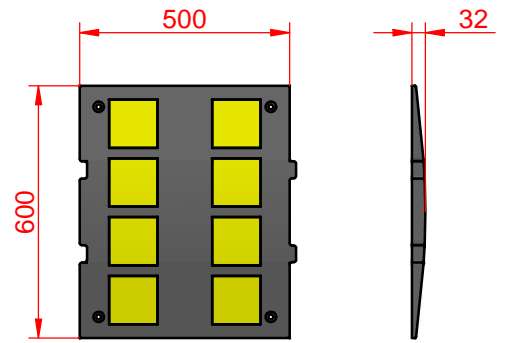
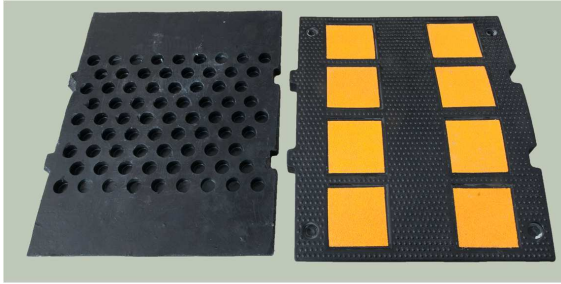


## FT - TECHNICAL SHEET


50 km/h limit speed bump. Height 32mm.  
 Dimensions 600x500x32mm. Eight rough yellow marks.  
 Weight 7Kg.  
 Male of female terminal of 600x250x32mm.

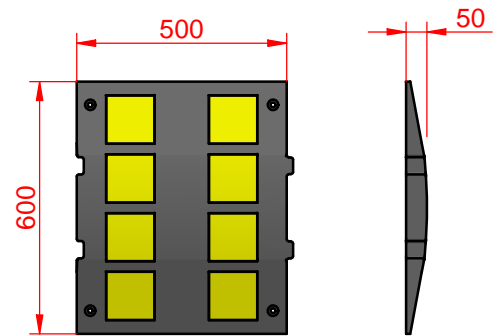

30 km/h limit speed bump. Height 50mm.  
 Dimensions 600x500x50mm. Eight rough yellow marks.  
 Weight 14Kg.  
 Male of female terminal of 600x250x50mm.



50 km/h limit speed bump. Height 50mm.  
 Dimensions 900x500x50mm. Six rough yellow marks.  
 Weight 19Kg.  
 Male of female terminal of 900x250x50mm.

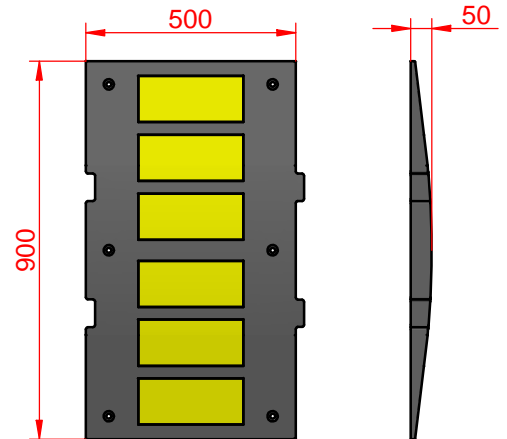

NATURAL RUBBER SPEED BUMPS		Ref.	REDUC
A4	Speed bumps made by compression of high quality regenerated rubber. Creep resistance (deformation use) for more than three years of heavy traffic. Reflective areas in yellow color, rough, antiskid when wet.		31-05-17
1:18			SC
FTR01	NATURAL RUBBER SPEED BUMPS		SC señalconfor